

Sharp Cut Filter (Red)

R-60

Catalog Thickness $t = 2.5$ mm

Reflection Factor $P_o = 0.915$

Diagram-1

Transmittance (T) & Internal Transmittance (τ) units: (%)

λ_{nm}	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440	
T																										
τ																										
λ_{nm}	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630	640	650	660	670	680	690	
T														.05	4.9	38.1	72.2	85.4	89.3	90.6	91.2	91.4				
τ														.05	5.4	41.6	78.9	93.3	97.6	99.0	99.7	99.9				
λ_{nm}	700	710	720	730	740	750	800	850	900	950	1,000	1,100	1,200	1,300	1,400	1,500	1,600	1,700	1,800	1,900	2,000	2,100	2,200	2,300	2,400	
T																										
τ																										

Refractive Indices

Symbol	i	h	g	F'	F	e	d	D	C'	C	r	A'	t
λ_{nm}	365.0	404.7	435.8	480.0	486.1	546.1	587.6	589.3	643.8	656.3	706.5	768.2	1,014.0
n							(1.534)		1.532	1.531	1.530	1.528	1.524

Abbe-Number

$$v_d = \frac{n_d - 1}{n_F - n_C} =$$

Color Specifications

	x	y	Y	λ_d	P_e
A	.690	.309	21.2	620	99
C	.687	.313	13.0	618	100
D_{65}	.686	.314	12.8	617	100


Properties

Chemical		Thermal				Mechanical		Other
D_w	D_A	T_g	T_s	$\alpha_{-30/70}$	$\alpha_{100/300}$	H_K	F_A	S
1	2	560	620	93	103	520	140	2.69

Tolerances of Transmittance (T)

Transition Wavelength	Transition Interval	Average High Transmittance
$\lambda T (nm)$	$\Delta \lambda (nm)$	$T_H (\%)$
600 ± 5	< 25	> 85

Transmittance (T)

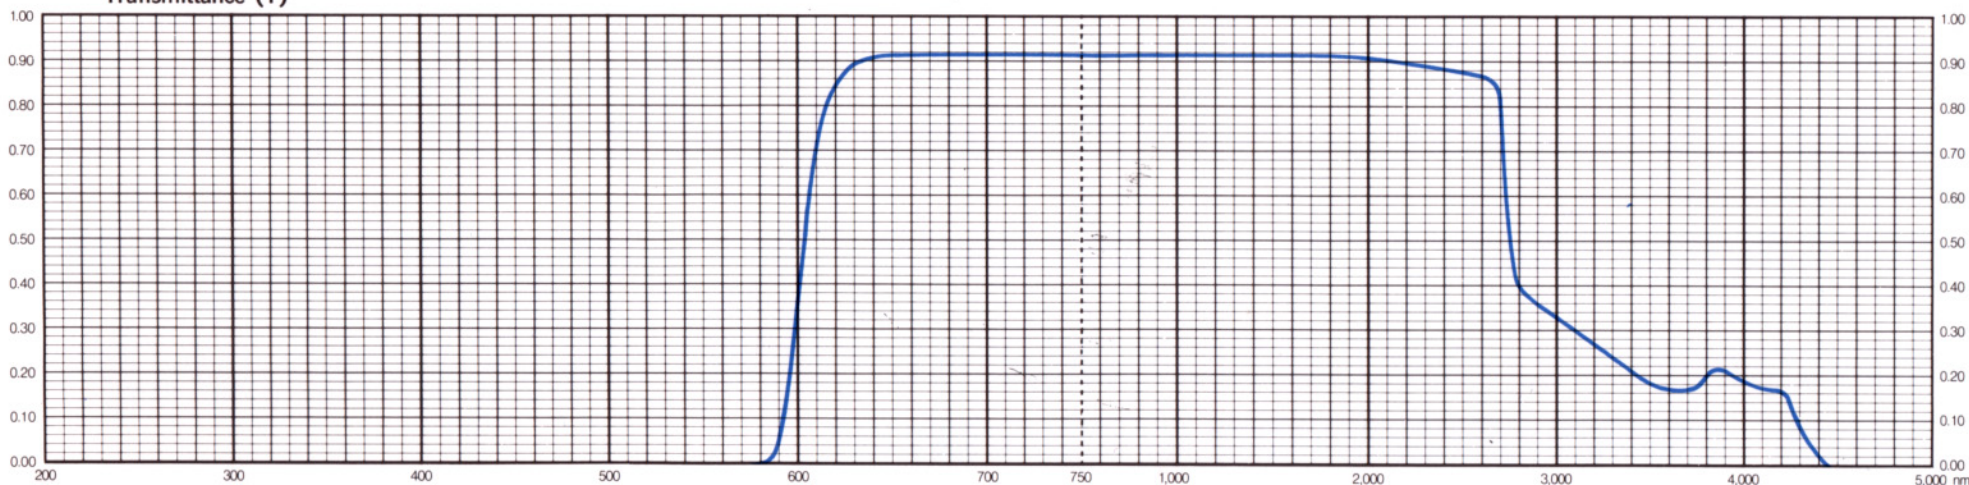

All data are mean values of various melts.